



# SAFE-T-PUNCH™

## PRODUCT DATA SHEET

# STP40D

July 2024 Rev 5



Heavy-duty 40mm Diameter Double Glazing device for 3mm to 12 mm Toughened Glass

### Components: -

Body: -	Black anodised aluminium
Plunger: -	Red anodised aluminium
Safety tag: -	Breakaway plastic
Impact tip: -	Carbide hard material
Adhesive: -	3M 4936 VHB Tape
Device Weight: -	96 g
Instructions Sticker Weight: -	12 g
Operating Instructions: -	IDSS (black-backed) Photoluminescent Grade C vinyl 136mm X 80mm Self-adhesive

### Performance data:-

Double glazing gap: -	20 mm
Operating means: -	By Hand.
Operating force required: -	3 Joules.
Temperature range:-	-20°C to 80°C

### Critical requirements: -


Installation: -	Install <b>SAFE-T-PUNCH™</b> on clearly marked readily breakable toughened safety glass only.
Suitability: -	NOT suitable for use on laminate glass (Front windscreen of vehicles).
Installation method: -	Clean, Peel and Stick.
Special instructions: -	The STP40D must be used in conjunction with 100-micron PET window film in accordance with our recommended installation instructions

### Compliances: -

Conforming to regulations: -	UN ECE R107 Emergency Windows technical requirements. FMVSS 217 Window retention and release. International Maritime Organisation Regulation 13.
------------------------------	--

### Quality: -

**SAFE-T-PUNCH™** is proudly produced in South Africa under TUV Certified ISO9001:2015 DAkkS Accredited Quality Management System.

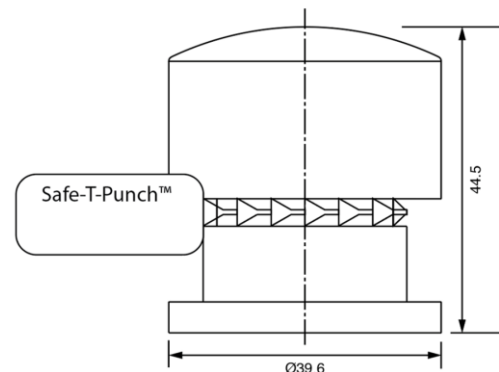

Globally distributed by PLR Distribution (Pty) Ltd  
www.Safe-T-Punch.co.za  
Enquiries@Safe-T-Punch.co.za