


INDUSTRY-LEADING TECHNOLOGY

SMART FUEL PUMPS

Self-diagnostic and prognostic features to keep you rolling.

- Continuous duty, with a range of flow rates available:
VS/CS7425 0 to 30-lpm (0 to 8-gpm)
VS/CS7435 30 to 60-lpm (8 to 16-gpm)
- Pressure control with target pressure between 0.5-bar and 10-bar (5-psi and 150-psi)
- Monitors and report the presence of air, sensor failure, locked rotor, filter clogging, thermal problems, limp home mode, and dry run conditions, etc.
- Visual status (LED) indicator for pump and system status.
- Handheld device for troubleshooting and diagnostics
- Energy savings by reducing parasitic loads
- Extended filter life

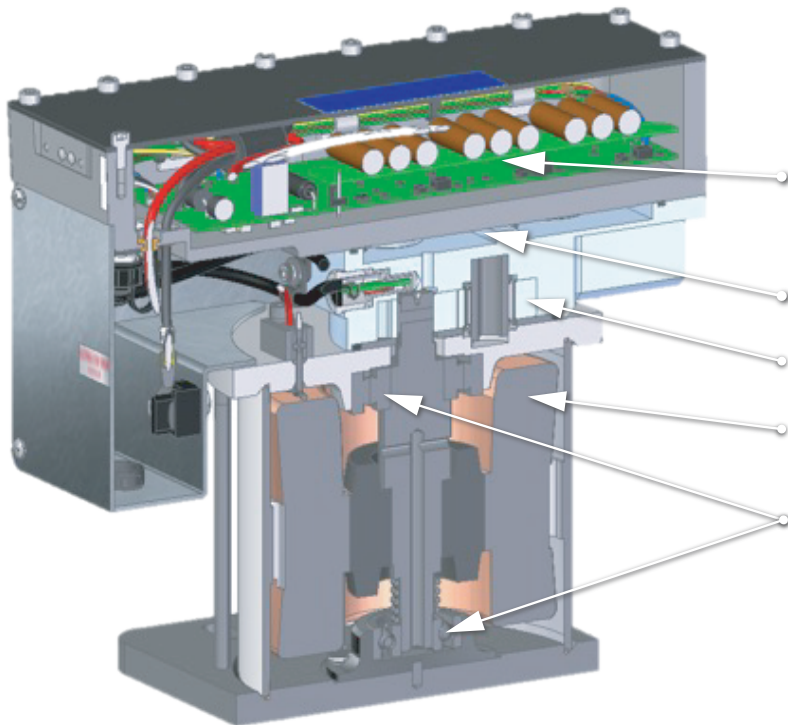

Intelligent controllers: 3 phase AC Controller 24VDC to 110VDC input; capable of variable speed, controlled via CAN, and/or closed loop pressure control

Media-cooled controller

Hardened gears

Media-cooled AC brushless motor

Continuously lubricated bearings, fresh fuel purges debris from bearings

Self priming and designed to be used with large debris – 30 mesh strainer (600 microns)

Exceptional durability; designed for over 10-years

Paragon Products, LLC

625 Coolidge Drive, Suite 100 Folsom, CA 95630
T: +1 (916) 941-9717 F: +1 (916) 941-9727
E: customerservice@paragonproducts.net
paragonproducts.net