

# KALIBER-XS1

Industrial M12 USB Flash Drives



## Reliable and secure data storage under harsh environmental conditions

- ▶ Failure-resistant SLC NAND Flash
- ▶ Ultra-compact robust design
- ▶ Temperature range -40 to + 70°C
- ▶ Error Checking and Correction ECC
- ▶ IP65/67 stainless steel housing
- ▶ M12 connector A-coded 4-pin
- ▶ Industry & railway DIN EN 50155
- ▶ Flash memory management

Access to reliable and secure data storage is often needed locally without the dependency on cloud storage, the KALIBER-XS1 are the ideal Plug&Play solution. The most compact M12 USB stick worldwide have been designed and developed for use in continuous operation under extreme environmental conditions. The superior shock and vibration resistance, the robust IP65/67 stainless steel housing, high dielectric strength and the extended temperature range make the USB Flash Drives suitable for industrial use and railways (DIN EN 50155). To ensure the highest level of data integrity and maximum endurance in data storage, a powerful Flash Management is used to handle the memory inside the USB drive. The ultra-compact design and low power consumption make the KALIBER-XS1 ideal for use in highly optimized applications requiring extreme ruggedness and reliability.

## General

**USB standard:** USB 2.0  
**Compatibility:** USB 2.0 (USB 1.1 and USB 3.0)  
**Termination:** M12 4-pin A-coded male  
**Dimensions l x d:** 53 x 21.4 mm  
**Weight:** 57 g  
**Material:** stainless steel 1.4305  
**IP Protection class (operation):** IP65/67  
**Isolation:** 2,250 VDC shield to electronics  
**MTBF (SN 29500, Mio. h):** 9.519

## Flash Memory

**Technology:** Single-level cell (SLC) NAND Flash  
**Data Retention:** Increased by flash memory management  
**Endurance:** Increased by flash memory management

Capacity	1 Gbit	4 Gbit	8 Gbit
<b>Technology</b>	SLC	SLC	SLC
<b>Usable memory (MB)</b>	90	440	900
<b>Over-Provisioning (%)</b>	5	5	5

## Flash Memory Management

**Wear-Levelling:** Yes  
**Error Correction Code (ECC):** Yes  
**Read-Disturb-Management:** Yes  
**Power-Fail Management:** Yes  
**Bad-Block Management:** Yes  
**Over-Provisioning:** Yes  
**Dynamic Data Refresh:** Yes

## Speed

**Sequential reading:** up to 21 MB/s  
**Sequential writing:** up to 16 MB/s  
**Average access time:** < 1 ms

## Power consumption

**Nominal voltage:** 5 VDC  $\pm$  10% via USB port  
**Power consumption Read mode:** 70 mA  
**Power consumption Write Mode:** 75 mA  
**Power consumption Standby mode:** 40 mA

## Approvals and certifications

CE, DIN EN 50155

## Status and diagnostic indicators

**LED:** Power / Data transfer

## EMC and environmental specifications

**Operating temperature:** -40°C to 70°C  
**Storage temperature:** -40°C to 85°C  
**Relative humidity (operation):** 0%-95% (not condensing)  
**Relative humidity (storage):** 0%-95% (not condensing)  
**Atmospheric pressure (operation):** 2,000 m (795 hPa)  
**EMC immunity:** DIN EN - 50121-3-2, 61000-6-2, 55024  
**EMC radiated emission:** DIN EN - 50121-3-2, 61000-6-4, 55032  
**Mechanical stability:** DIN EN 61373


## Pin assignment

Pin	Name	Description
1	VBUS	+5 VDC
2	D-	Data-
3	D+	Data+
4	GND	0 VDC
Fitting	Shield	Housing

## Loss protection ring

**Metal circlip with 3.5 mm hole for fixing:** Yes, special Art.-No.

## Drawing

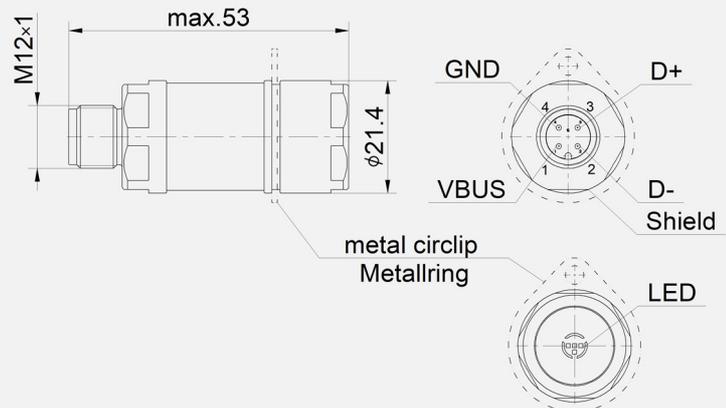

## Products

Article	Art.-No.	Specification
KALIBER-XS1-1100	911100	M12 A-coded, 8Gbit SLC
KALIBER-XS1-1101	911101	M12 A-coded, 1Gbit SLC
KALIBER-XS1-1102	911102	M12 A-coded, 4Gbit SLC
KALIBER-XS1-1110	911110	M12 A-coded, 8Gbit SLC, Circlip
KALIBER-XS1-1111	911111	M12 A-coded, 1Gbit SLC, Circlip
KALIBER-XS1-1112	911112	M12 A-coded, 4Gbit SLC, Circlip

