

**NEW**

## MAKROFON EM660/370 TSI

### QUICK SET-UP

- » electrical control, compressed air supply is not necessary

### COST SAVINGS

- » only one horn per driving direction is necessary
- » Each horn provides two frequencies e.g. 370 Hz and 660 Hz

### WEATHER-RESISTANT


- » corrosion-resistant

### OPTIONAL FEATURES

- » announcements via microphone
- » indicator „Ready for use“ for drivers cab
- » internal signal protocol with real-time stamp

## Electrical Makrofon - EM6660/370

- » sound pressure level:  
101 – 109 dB(C) in 25 m, 129 – 137 dB(C) in 1m
- » frequency: 370+/-20 Hz, 660+/-30 Hz
- » additional frequencies are available

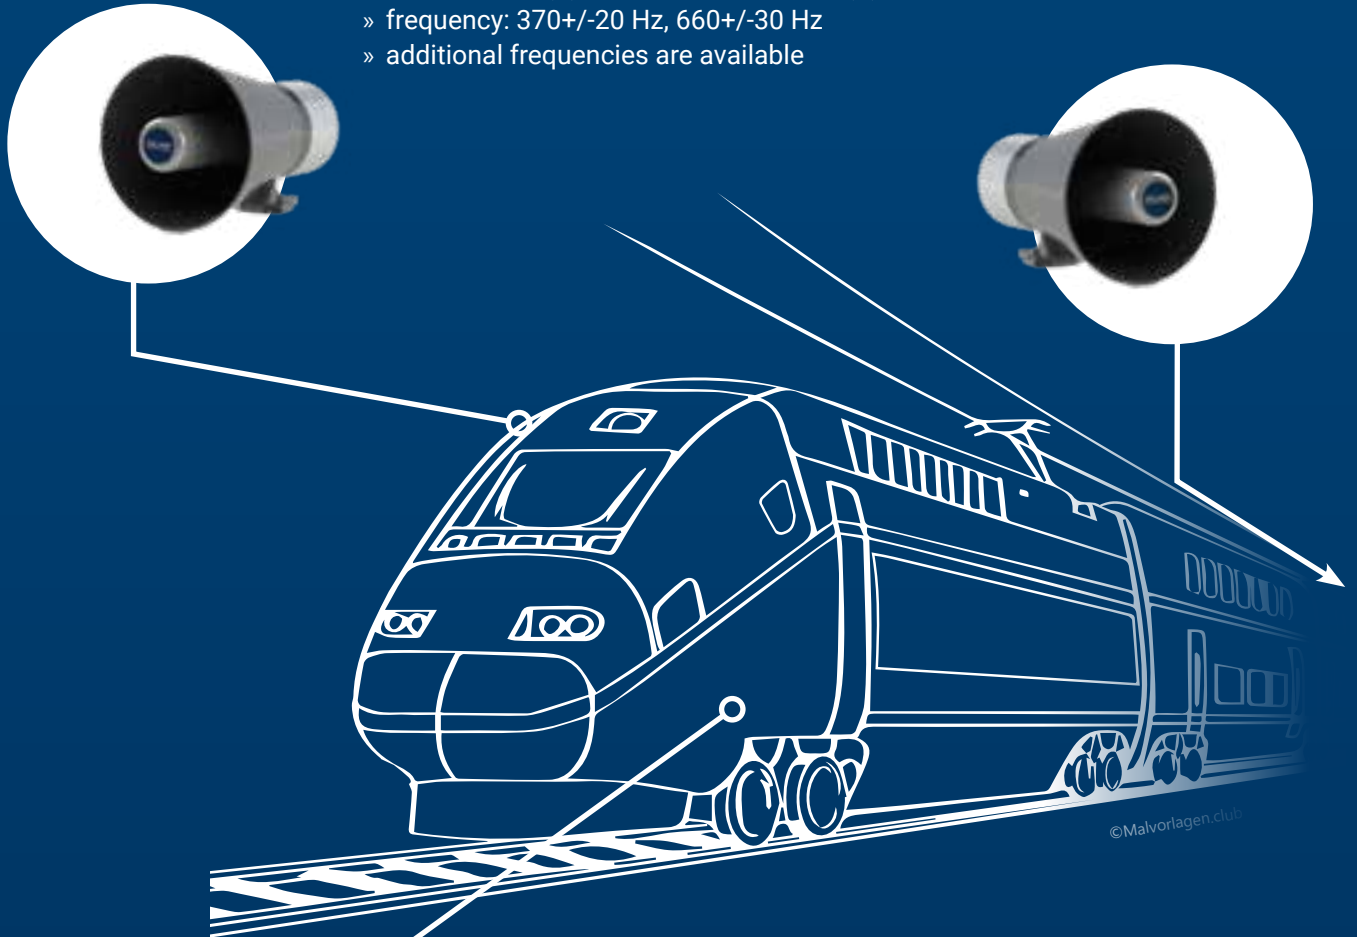

## Control and amplifier unit EM660/370 TSI

- » supply voltage: 24 V DC
- » stable sound level with voltage fluctuation of 16.8 - 30 V DC
- » power consumption at signal: 15 A

## ADDITIONAL INFORMATION

- » temperature range: -40°C up to +60°C
- » EMV requirements according to EN50121-3 are fulfilled
- » protection class IP 65 (sound speaker) and IP 54 (control and amplifier unit)